

Fuzzy logic based clustering in wireless sensor network

¹ Aravind Kumar Sharma, ² Nitesh Kumar

¹ Assistant Professor, Department of Computer Science, OPJS University Churu, Rajasthan, India

² Research Scholar, OPJS University Churu, Rajasthan, India

Abstract

A wireless sensor network is an autonomous system of sensor nodes. It has a Base Station and sensor nodes. Sensor nodes collect data from their environment and send it to the Base Station. Heterogeneous sensor network contains high energy sensor nodes as well as low energy nodes. A single-tier network can cause the gateway to overload with the increase in sensors density. Such overload might cause latency in communication and inadequate tracking of events. In addition, the single-tier architecture is not scalable for a larger set of sensors covering a wider area of interest because the sensors are typically not capable of long-haul communication. Hierarchical clustering is particularly useful for applications that require scalability to hundreds or thousands of nodes. Scalability in this context implies the need for load balancing and efficient resource utilization.

All nodes in a network can be organized in hierarchical structures called clusters. Each cluster consists of a cluster head and several member nodes. The member nodes collect data and send it to their cluster heads. The cluster head aggregates and transmits the data to the Base Station. The energy consumption of cluster heads is higher than that for member nodes. Clustering algorithms are required which can efficiently utilize the energy of nodes so that life of network can be increased. Here we are proposing Fuzzy Logic based clustering for homogenous sensor networks.

Keywords: fuzzy logic, clustering, wireless sensor network

1. Introduction

Wireless Sensor Network (WSN) consists of a large number of low-cost sensors which communicate with each other via wireless channel. WSN has been proposed for a wide variety of applications such as target tracking, security, environment monitoring. A major application of WSN is to measure the environment parameters and transmit the sensor readings to remote server. Because neighboring sensors may detect the common phenomenon, there is high redundancy in their raw data and it is inefficient to transmit all raw data to remote server. Clustering has been widely used in wireless sensor networks (WSNs) to increase scalability, improve energy efficiency and provide QoS guarantees. With clustering, sensor nodes are organized into clusters and a cluster head (CH) node is selected for each cluster according to certain rules, while other nodes act as members in the clusters. In cluster-based data gathering, data collected by cluster members are first sent to CHs, which in turn deliver the data to the data sink either by direct communication or through relays on intermediate CHs. While clustering is initially introduced to achieve energy efficiency, it can also help maintain low packet latency in delay-sensitive data gathering. This is because that packets from different members can be combined as aggregated packets at CHs to reduce the transmission overhead of packet headers and control packets (e.g., ACK packets), leading to shortened transmission delay. In addition, clustering simplifies the routing from the source node to the sink and shorter routing paths reduce network traffic as well.

2. Related Work

Ajay Jangra *et al.* ^[1] present a novel security S-LEACH mechanism which is the extension of LEACH routing protocol used for detecting the Sybil attack. The mechanism is

configured to initiate the Sybil attack whose detection is relayed on RSSI (an indicator of signal strength) when the number of cluster heads in WSN is above the threshold. The security mechanism is canvassed by the safety of the stage and energy consumption through a series of experiments.

Deng Zhejiang *et al.* ^[2] performed; due to the limitation of power and memory size for WSN, the routing protocol for wireless sensor networks must maintain small routing information and reduce the power consumption as much as possible. LEACH protocol and PEGASIS protocol are analyzed firstly in this paper. Use for reference of the ideas used in both of the two protocols of reducing power dissipation, a three-layered routing protocol for WSN based on LEACH (TL-LEACH) is given.

Fan Xiangning *et al.* ^[3] studies LEACH protocol, and puts forward energy-LEACH and multihop-LEACH protocols. Energy-LEACH Protocol improves the choice method of the cluster head, makes some nodes which have more residual energy as cluster heads in the next round. Multihop-LEACH Protocol improves communication mode from single hop to multihop between cluster head and sink. Simulation results show that Energy-LEACH and Multihop-LEACH Protocols have better performance than LEACH Protocols.

Fuzhe Zhao, You Xu, Ru Li, Wei Zhang *et al.* ^[4] propose a new method of choosing cluster-heads with decreases unnecessary consumption of energy spent on computing of each node during each round. In order to make the energy distribute more even in the network, the consideration of the dynamic change of sensor nodes energy will be introduced during the selection of CHs.

Fuzhe Zhao *et al.* ^[5] proposes a new method of choosing cluster-heads which decreases unnecessary consumption of energy spent on computing of each node throughout each

round. Because the traditional selection formula neglecting to the change of nodes' energy will make the nodes acting as cluster-heads (CHs) too many times die early owing to consume more energy.

Haosong Gou *et al.* [6] this paper proposes an improved LEACH (LEACH-C) algorithm called partition-based LEACH (pLEACH), which firstly partitions the network into optimal number of sectors, and then selects the node with the highest energy as the head for each sector, using the centralized calculations. The idea behind LEACH is to form clusters of the sensor nodes depending on the received signal strength and use local cluster heads as routers to route data to the base station and the corresponding clusters.

Heewook Shin *et al.* [7] proposed a new energy efficient clustering scheme. He stated that in LEACH, however, extra energy and time are consumed to reform clusters at the setup phase of every round. This side effect is bad as the number of clusters increases. This paper present a novel energy-efficient clustering scheme to remove cluster recreating process required at every round after the first round, which is called COTS (Clustering with One Time Setup). The proposed COTS allow that the role of cluster head is rotated among members in a cluster without cluster reforming process. This way significantly saves the energy because the cluster reforming process is not needed, resulting in increased network lifespan.

Hu Jumping *et al.* [8] performed a wireless sensor network consists of hundreds or thousands of small energy-limited sensors that are densely deployed in a large geographical region. It has been demonstrated that Low-Energy Adaptive Clustering Hierarchy is an energy-efficient routing algorithm for Wireless Sensor Networks.

Jun YUE, Weiming ZHANG, Weidong XIAO, Daquan TANG, Jiuyang TANG *et al.* [9] presents a novel unequal cluster-based data aggregation protocol is proposed. It divides the network into some grids with unequal sizes, and implements cluster head rotation in each grid respectively. It is able to balance energy dissipation by setting proper sizes of grids to adjust the number of nodes that participate in cluster head rotation in different grids.

Y. Yang *et al.* [10] performed a work, Based on the analysis on the defect in LEACH including the fluctuation of the number of cluster heads and the ignorance of the node's residual energy, this paper presents a novel protocol called LEACH-B (LEACH- Balanced). At each round, after first selection of cluster head according to LEACH protocol, a second selection is introduced to modify the number of luster head in consideration of nodes residual energy. As a result the number of cluster head is constant and near optimal per round.

Muhammad Omer Farooq *et al.* [11] presents a multi-hop routing with low energy adaptive clustering hierarchy protocol. MR-LEACH follows the fundamental principle of multi-hop routing from cluster-heads to a Base station to conserve energy, unlike the leach protocol. In MR-leach they partition the network into different layers of clusters. Where Cluster heads in each layer collaborates with the adjacent layers to Transmit sensor's data to the base station. Ordinary nodes Join cluster heads based on the received signal strength indicator (RSSI).

In year 2010, Muhammad Omer Farooq *et al.* [12] performed a work. In this paper, we present a Multi-hop Routing with Low

Energy Adaptive Clustering Hierarchy (MR-LEACH) protocol. In order to prolong the lifetime of Wireless Sensor Network, MR-LEACH partitions the network into different layers of clusters. Cluster heads in each layer collaborates with the adjacent layers to transmit sensors data to the base station. Ordinary sensor nodes join cluster heads based on the Received Signal Strength Indicator (RSSI).

Nandini. S. Patil, Prof. P. R. Patil *et al.* [13] presented a data aggregation framework on wireless sensor networks is presented. The framework works as a middleware for aggregating data measured by a number of nodes within a network. They compare the performance of TAG (Tiny Aggregation) in terms of energy efficiency in comparison with and without data aggregation in wireless sensor networks and to assess the suitability of the protocol in an environment where resources are limited.

Wei Bo Hu Han *et al.* [14] performed a work; Conventional LEACH includes distributed cluster formation, local processing to reduce global communication, and randomized rotation of the cluster-heads. The new protocol uses multi-hop routing instead of 2-hop routing in LEACH, and related algorithm is proposed. Simulation results show that improved protocol is more energy-efficient that conventional LEACH.

Wendi Rabiner Heinzelman, Anantha Chandrakasan and Hari Balakrishnan *et al.* [15]; LEACH a clustering based routing protocol that minimizes global energy usage by distributing the load to all the nodes at different points in time. LEACH outperforms static clustering algorithms by requiring nodes to volunteer to be high-energy cluster-heads and adapting the corresponding clusters based on the nodes that choose to be cluster-heads at a given time.

Wei Wang *et al.* [16] performed to prolong the WSN lifetime, a refined protocol named LEACH-H is proposed in this paper. This will not only solve the problem that the cluster heads are unevenly distributed in LEACH, but also maintain the characteristics of distribution. The energy consumption of the network is cut down and the live time of WSN is extended in Leach-H.

Yuling Li Luwei Ding *et al.* [17] finds anew improve method which is called LEACH-N base on LEACH. According to this new protocol, the problem that how to choose nodes as the cluster head node depend on the residual energy of nodes in the cluster. This strategy guarantees the rationality during selecting head nodes.

3. Proposed Protocol

Proposed function implements Fuzzy Logic based clustering which in enhanced form of weight based clustering in wireless sensor networks. Weight based clustering protocol has the disadvantage that it elects unnecessarily extra cluster head. Sometimes Nodes with high residual energy were not given a chance to become cluster head.

This disadvantage is overcome by Fuzzy Logic based clustering algorithm. All nodes with similar energy are given same chances to become cluster head.

Also a node with high residual energy even if it is lying in captivity of another cluster head will be elected as a cluster head. The proposed clustering technique is an enhancement our Weight based clustering. The overarching goal of our approach is to prolong network lifetime. For this reason, cluster head selection is primarily based on the residual energy

of each node. Measuring this residual energy is not necessary, since the energy consumed per bit for sensing, processing, and communication is typically known, and hence residual energy can be estimated. Fuzzy logic is used for finding cluster head which always chooses optimal number of cluster heads. The use of fuzzy logic is appropriate, whenever it is not possible to employ a mathematical model for the system. Additionally, fuzzy can reduce the complexity of the model; computational effort and memory's receive context information from nodes as input and converts into fuzzy linguistic variable input. First order radio energy is used for performing radio analysis. It takes the following form

$$\begin{aligned} E_{init} &= 0.5 \text{ in joules} \\ E_{elec} &= 50 * 0.000000001 \\ EMP &= 0.0013 * 0.000000000001 \\ E_{da} &= 5 * 0.000000001 \end{aligned}$$

Where E_{init} is initial energy, E_{elec} is electrical energy, EMP is amplification energy, E_{da} is data aggregation energy.

The Pseudo code

The Pseudo code of Proposed Model is as Follows:

Step 1: Start

Step 2: Create a Network

Step 3: Create Clusters from network using:

- i) A CH is selected from the SNs by considering a multiple metrics i.e. residual energy and a distance from non-CH to CH using the concept of Fuzzy logic and Cluster is created.
- ii) Based on last step, Non-CHs select the best CH based on distance matrices to become its member.

Step 4: Stop

4. Performance Evaluation

This part presents the simulation and results of the presented model of chapter 4.

4.1 Simulation Scenario

Initially there is a network in which nodes are distributed randomly as shown in figure 1.

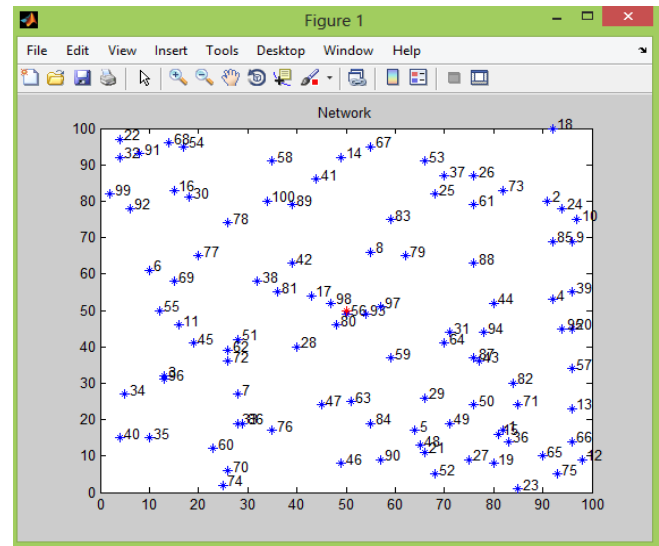


Fig 1: Network creation using 100 Nodes.

In figure 2 new scheme is implemented in which cluster head are elected based on the given logic of presented model. These cluster head are shown by star shape in blue color (*). Red stars are dead nodes.

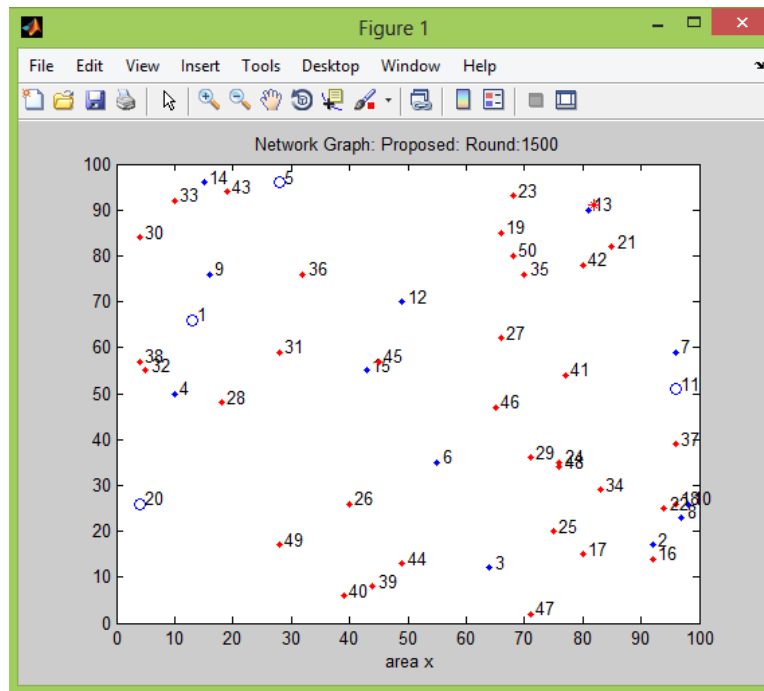


Fig 2: Cluster Formation

Each Normal node will elect its cluster head based on Probability which can be calculated Fuzzy Logic System using the two input variables “distance between the node & cluster

head” and “Residual Energy”.

Figure 3 and figure 4 show both inputs and their corresponding graphical representation in fuzzy system.

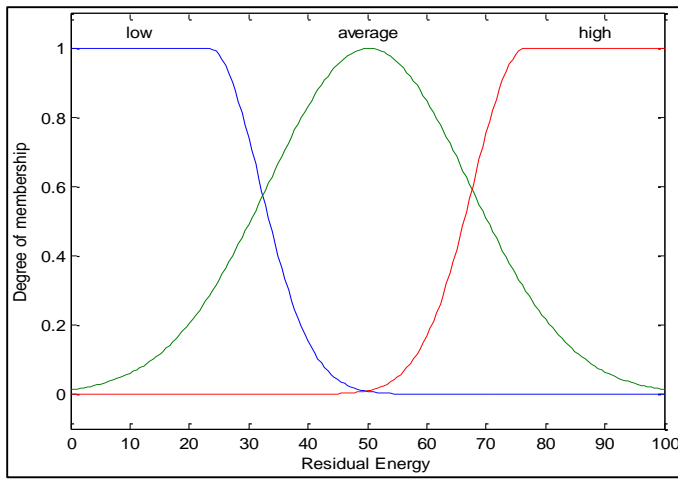


Fig 3: Degree of membership for Residual energy as first input for fuzzy system.

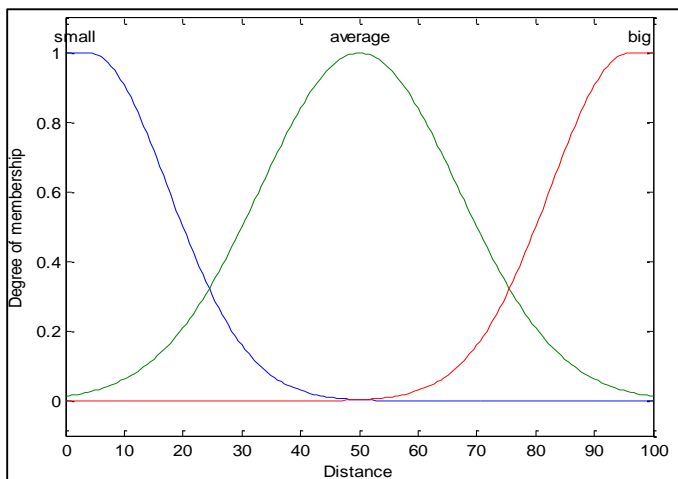


Fig 4: Degree of membership for Distance as second input for fuzzy system.

Correlation between Residual energy and Distance for Fuzzy system is shown in figure 5.

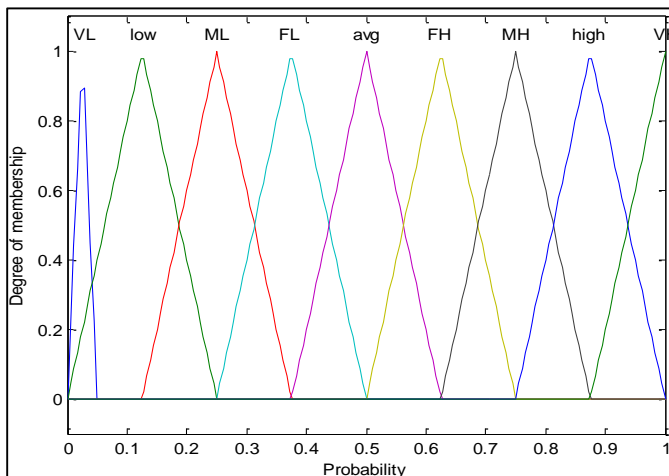


Fig 5: Correlation between Residual energy and Distance for Fuzzy system

Finally figure 6 shows the surface graph for probability calculation for cluster formation.

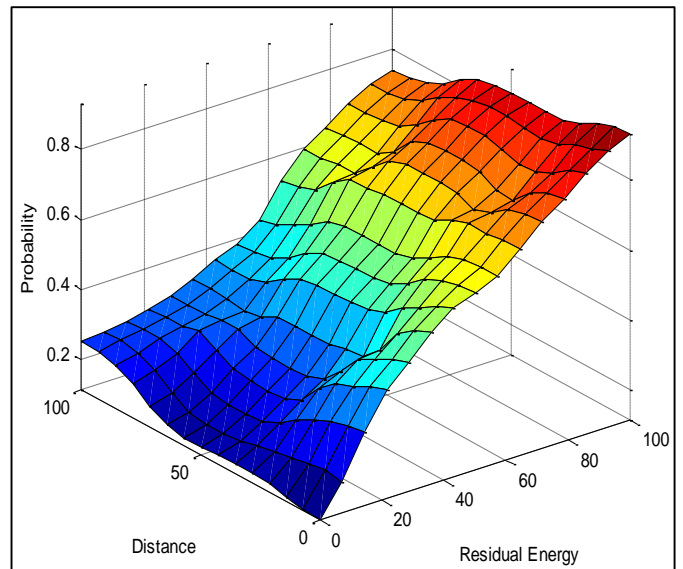


Fig 6: Surface Graph for Probability Calculation for cluster formation.

Using this Probability Calculation fuzzy logic, each normal node calculates the probability for each cluster head. The node which has the highest probability with respect to any cluster head will be the member of that cluster for cluster head in that round. In this way Cluster formation is done in the presented work.

4.2 Performance Evaluation

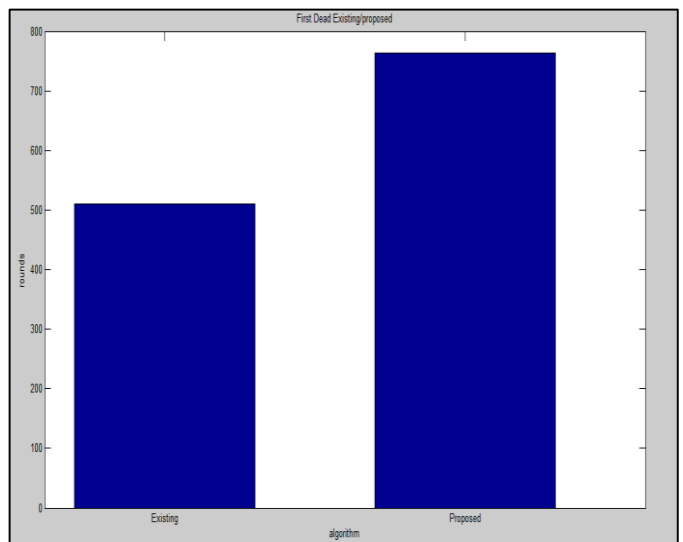


Fig 7: Comparison of existing and proposed system in terms of first dead.

The figure 7 graph shows that first dead node in our proposed algorithm happens after 700 rounds in spite of existing weight based algorithm which is having its first dead very close to 500 round. Hence our algorithm is Energy efficient than existing algorithm.

Figure 8 gives the graph which compares the performance of existing and proposed system in terms of number of dead nodes with total number of clustering rounds. Green line represents the proposed system and blue line represents the existing system. Graph shows that proposed system shows improved performance over existing system in 1000 rounds.

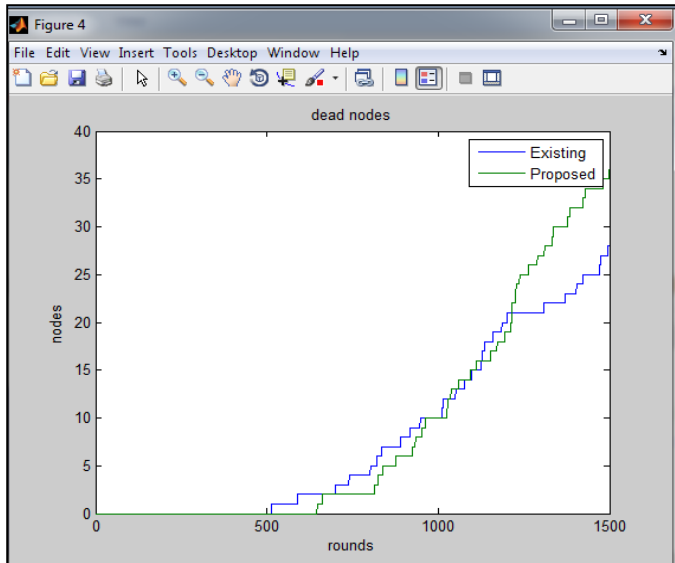


Fig 8: Performance Evaluation of existing and proposed system in terms of no. of dead nodes & no. of rounds.

The Fig 9 gives a comparison of the performance of existing and proposed system in terms of number of dead residual energy with total number of clustering rounds. Green line represents the proposed system and blue line represents the existing system. Graph shows that proposed system have almost same residual energy up to initial 500 rounds as existing system is having.

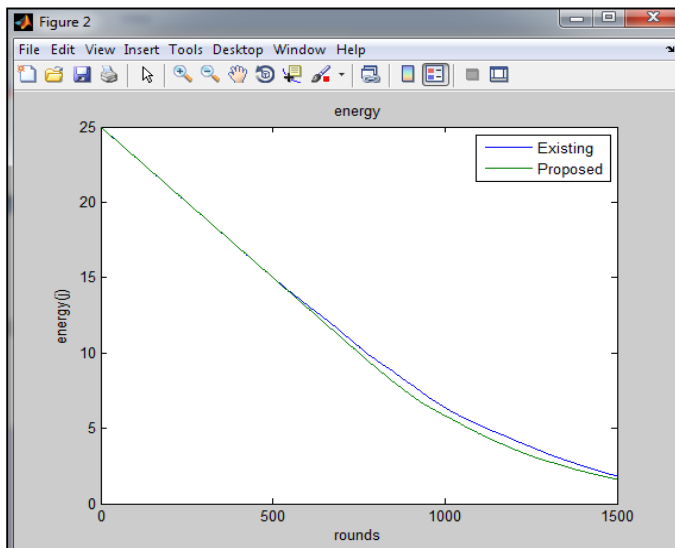


Fig 9: Comparison of the performance of existing and proposed system in terms of number of dead residual energy with total number of clustering rounds

5. Conclusion

We have presented an efficient technique for clustering of sensor nodes in the homogenous WSNs. In the existing LEACH protocol the clusters are formed using the distance calculation from the node to cluster head. But for a network to be good designed there should be a better cluster formation.

For a better cluster formation the concept of fuzzy logic is used in which non-CHs select the best CH by considering a multiple metrics, i.e. residual energy and a distance from non-CH to CH. Then, non-CHs compute a probability value to each CH candidate. The non-CH chooses the CH with a higher probability value and sends a join message to CH.

The use of fuzzy logic is suitable, whenever it is not possible to use a mathematical model for the system. Additionally, fuzzy can reduce the complexity of the model, computational effort and memory. Energy consumption is affected by message communication between nodes, so our technique is efficient than traditional LEACH protocol. Also weight based clustering protocol has the disadvantage that it elects unnecessarily extra cluster head. Sometimes Nodes with high residual energy were not given a chance to become cluster head. This disadvantage is overcome by Fuzzy Logic based clustering algorithm. All nodes with similar energy are given same chances to become cluster head. Also a node with high residual energy even if it is lying in captivity of another cluster head will be elected as a cluster head.

6. Future Scope

This algorithm is implemented for homogenous wireless sensor networks. Algorithm can be further implemented for heterogeneous networks.

7. References

1. Ajay Jangra, Swati, Priyanka, "Securing LEACH Protocol from Sybil Attack using Jakes Channel Scheme (JCS).
2. Deng Zhixiang, "Three-layered Routing Protocol for WSN based on LEACH Algorithm," IEEE, 2008.
3. Fan Xiangning, "Improvement on LEACH Protocol on Wireless Sensor Network," mt. Conference on Sensor Technologies and Applications. 2007.
4. Fuzhe Zhao, You Xu, Ru Li, Wei Zhang, "Improved Leach Communication Protocol for WSN," Int. Conference on Control Engineering and Communication Technology, 2012.
5. Fuzhe Zhao, You Xu, Ru Li, Wei Zhang, "Improved Leach Communication Protocol for WSN", 2012 International Conference on Control Engineering and Communication Technology IEEE.
6. Haosong Gou, "An Energy Balancing LEACH Algorithm for Wireless Sensor Networks," 7th Conference on Information Technology, 3 October, 2010.
7. Heewook Shin, Sangman Moh, Ilyong Chung, "Energy-Efficient Clustering with One Time Setup for Wireless Sensor Networks" IEEE 2012.
8. Hu Junping, "A Time-based Cluster-Head Selection Algorithm for LEACH", IEEE, 1 August, 2008.
9. Jun YUE, Weiming ZHANG, Weidong XIAO, Daquan TANG, Jiuyang TANG, "A Novel Unequal Cluster-based Data Aggregation Protocol for Wireless Sensor Network," *Przełąd Elektrotechniczny*, Issn 0033-2097, R. 89 NR 1b/2013.
10. Ma M, Yang Y, "Data gathering in wireless sensor networks with mobile collectors," in Proceedings of the 22nd IEEE International Parallel and Distributed Processing Symposium (IPDPS '08), April 2008.
11. Muhammad Omer Farooq, Abdul Basit Dogar, Ghalib Asadullah Shah, MR-LEACH: Multi-hop Routing with Low Energy Adaptive Clustering Hierarchy Fourth International Conference on Sensor Technologies and Applications IEEE. 2010.
12. Muhammad Omer Farooq, "MR-LEACH: Multi-hop Routing with Low Energy Adaptive Clustering Hierarchy," Fourth Int. Conference on Sensor Technologies and applications, 2010.
13. Nandini S. Patil Prof PR. Patil, "Data Aggregation in Wireless Sensor Network," IEEE International Conference on Computational Intelligence and Computing Research, 2010.
14. Heinzelman WB, Chanrakasan AP, Balakrishnan H, "An Application-Specific Protocol Architecture for Wireless Microsensor Networks," *Transactions on Wireless Communications*, 2002; 1:4:660-670.
15. Heinzelman WR, Chandrakasan A Balakrishnan H. "Energy-Efficient Communication Protocol for Wireless Microsensor Networks", Proc. 33rd Hawaii Int. Conference on System Science, 2000; 2:4-7.

16. Wu Xinhua. Performance Comparison of LEACH and LEACH-C Protocols by NS2,” 9th Int. Symposium on Distributed Computing and Applications to Business, Engineering and Science, 2010.
17. Yuling Li, Luwei Ding, FengLiu. “The Improvement of LEACH Protocol in WSN”, International Conference on Computer Science and Network Technology IEEE 2011.